

Interline 984

Versatile epoxy phenolic tanklining

Interline® 984 is a solvent-free, epoxy phenolic lining system, applied in a single coat, offering chemical resistance in a wide range of applications.

A wide resistance to crude and refined petrochemicals as well as biofuels make Interline® 984 an ideal choice for use in storage tanks in downstream refineries and terminals.

- Solvent-free, low VOC epoxy phenolic tank lining
- Suitable for use as a single coat lining system or in conjunction with glass fibre laminate systems
- Recoatable up to 28 days for improved scheduling of contracts
- Suitable for the storage of refined petrochemicals
- Complies with immersion testing requirements of EI1530 for aviation fuel storage



Interline 984 is an ideal lining for the refining and petrochemical industry, where one product is required to reduce complexity

Ease of Application

Interline® 984 has been formulated with ease of application at the forefront. The product can be sprayed cold through a single leg, airless pump, and repairs can be made by brush up to 28 days later.

Reinforced Systems


Interline® 984 can be applied as a chopped strand or laminate system, where tank floor rehabilitation requires additional strength from the lining system.

Performance Benefits

- Compliance with EI1541 test protocol for storage of aviation fuel
- Resistant to crude oil up to 90°C (194°F), including sour crude
- Resistant to all types of biodiesel
- Can be applied with chopped glass (Matcote®), laminate, or used as part of an Interline® MR system

Technical Information

Color	Yellow, Green, White
Volume Solids	100%
Film Thickness	300-1400µm (12-56 mils) depending on system requirements
Mix Ratio	2:1 by volume
Maximum Recoat Time	Up to 28 days

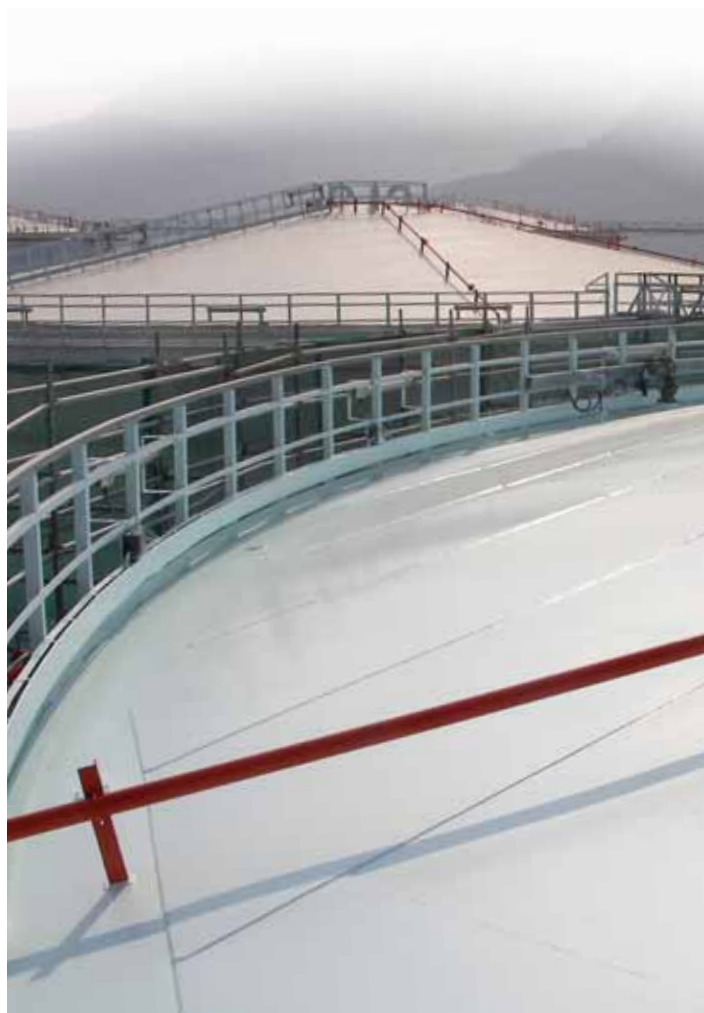

www.international-pc.com
pc.communication@akzonobel.com

✕ and **International** and all product names mentioned in this publication are trademarks of, or licensed to, Akzo Nobel. © Akzo Nobel 2014.

International Paint has used its best endeavors to ensure that the information contained in this publication is correct at the time of printing. Please contact your local International Paint representative if you have any questions.

Unless otherwise agreed by us in writing, any contract to purchase products referred to in this brochure and any advice which we give in connection with the supply of products are subject to our standard conditions of sale.